



AERTEC

aertecsolutions.com

EUROPE
LATIN AMERICA
MIDDLE EAST
NORTH AMERICA

T. +34 95 10 10 200

rpas@aertecsolutions.com



EUROPE

SPAIN

MALAGA
Avda. Juan López de Peñalver, 17
Parque Tecnológico de Andalucía
(29590) Málaga

SEVILLE
C/ Hispano Aviación, 11
Parque Tecnológico Aeroespacial
Aerópolis (41300) La Rinconada
Sevilla

MADRID
Parque Empresarial La Carpetania
Edificio Charmex
C/ Miguel Faraday, 20
(28906) Getafe - Madrid

BARCELONA
Aeropuerto de Barcelona-El Prat
Bloque Técnico, 1º Planta Of. 57
(08820) El Prat del Llobregat
Barcelona

UNITED KINGDOM

CHESTER
Rossmore Business Village
10 Inward Way, Unit 4
Ellesmere Port / Chester
CH653EY

GERMANY

HAMBURG
Hein-Saß-Weg 24
21129 Hamburg

FRANCE

TOULOUSE
In situ Business Center
Batiment Socra
17 Av Didier Daurat
31700 Blagnac

LATIN AMERICA

COLOMBIA

BOGOTA
C/ 93B, numero 19-35
Oficina 201
(110221) Bogotá D.C.

MIDDLE EAST

UNITED ARAB EMIRATES

ABU DHABI
P.O. Box 2313, Business Centre-01
Abu Dhabi Airports Free Zone

NORTH AMERICA

UNITED STATES


DELAWARE
251 Little Falls Drive
Wilmington, DE 19808
New Castle County



RPAS

Solutions for observation,
surveillance and emergency

TARSIS 25

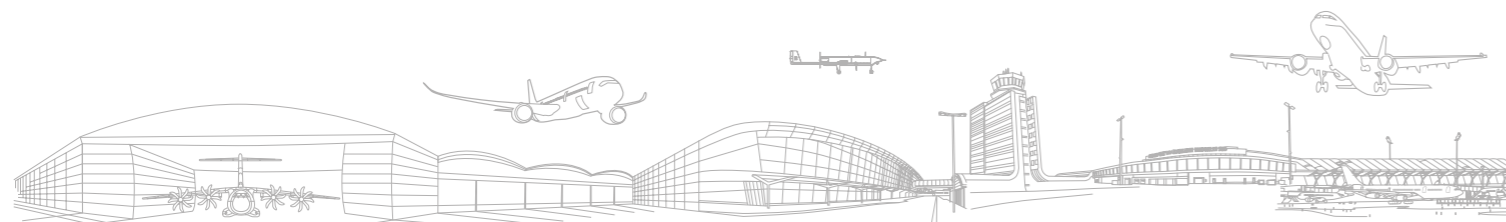



RPAS

Solutions for observation, surveillance and emergency



TARSIS 25
Fixed wing
RPAS


RPAS

TARSIS 25 is a high end class I small RPAS in the 25 kg category. It has been specifically designed and engineered for two very important variables:

- A large payload integration capacity (< 5 kg)
- A very long endurance (< 8 hours)

Both capabilities provide a large variety of operational configurations which allow for a very high adaptation to very demanding operational environments.

TARSIS solutions are ATOL (Autonomous Take-Off and Landing) which include an automated control system for all flight phases (take-off, flight and landing). They can integrate many different options like satellite backup link, emergency parachute recovery, alternative spectral sensors, etc.



TARSIS 25

CHARACTERISTICS	
· MTOW	25 kg
· Maximum payload	5 kg
· Maximum endurance	8 h
· Maximum flight altitude	4 000 MASL
· Operational video range	40 / 150 km
· Wingspan	4 m
· Length	2.5 m
· Height	0.89 m
· Cruise speed	100 km/h



➔ For more information contact us:
rpas@aertecsolutions.com

CMV25.FT.EN.V04

Configurable high performance fixed wing RPAS solutions to provide versatile systems capable to carry out different missions

TARSIS RPAS solutions integrate advanced dual EO+IR surveillance gyrostabilized sensors with automatic detection capabilities, video tracking and geotracking, allowing for day and night missions.

The sensors are configurable to the specific needs of the mission providing valuable real time data from the area of interest. Capable of automatically generate and detect moving objectives at 8 km of distance.



Automatic detection and tracking of persons



GUIDANCE/CONTROL SYSTEMS

- Waypoint flexible configuration
- Holding flight modes: altitude/bearing/ speed
- Return to base mode
- Linear/helical ascending/descending
- Planned and/or commanded Loiter
- Contingency/emergency implementation

TAKE OFF/LANDING

- ATOL (Automatic Take Off and Landing)
- Operation from non-prepared landing strips
- Parachute emergency recovery (optional)

Ground Control System (GCS)



Automatic detection and tracking of moving vehicles

COMMUNICATION SYSTEMS

Primary real time video/data link	
· Type of antenna	Directional antenna / Optional autotracking capabilities
· Operational video range	40 / 150 km
Secondary data link (optional)	
· Security optional system	Satellite link
· Operational range	Unlimited